

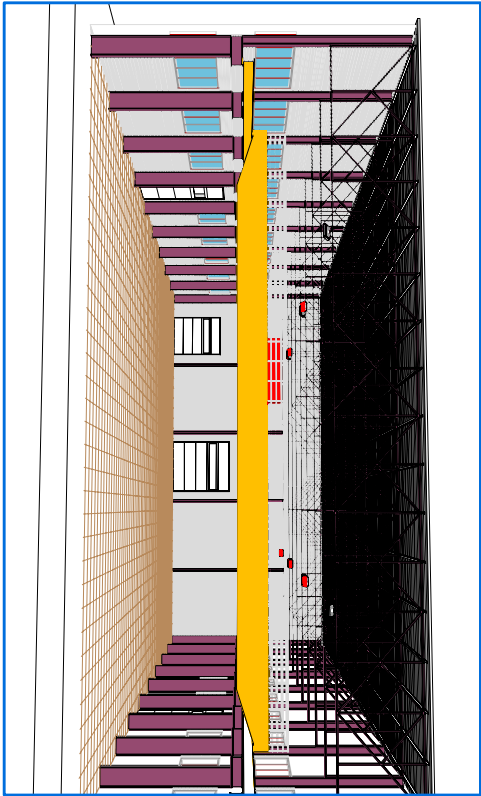
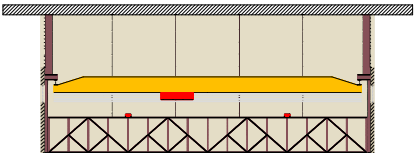


PRELIMINARY
PROJECT

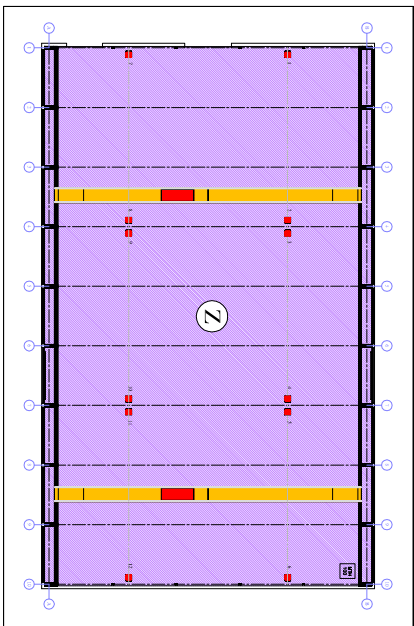


and the number of radiators were defined power by the customer

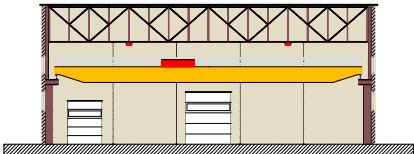

NOTA:

A THERMAL PROTECTION MUST BE INSTALLED BY THE CUSTOMER ABOVE HEAT SENSITIVE SECTIONS OF THE OVERHEAD CRANE MINIMUM CLEARANCE: 2 M

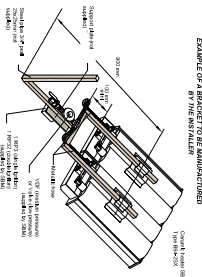

EXAMPLE OF A BRACKET TO BE MANUFACTURED BY THE CUSTOMER

NOTE: THE E-PROFIL AS HEATER MUST BE INSTALLED IN ACCORDANCE WITH APPROVED RULES AND REGULATIONS, AND IN FULL COMPLIANCE WITH ALL APPLICABLE STANDARDS.



SOCIETE
SARL ALFATON
MECANIQUE




SHEET N° B16683
E-PROFIL AS

HEATING BY CERAMIC HEATERS WITH THERMOCHROMIC INSULATION
DATA: 1000 W/m²
MAXIMUM TEMPERATURE: 120°C
MAXIMUM PRESSURE: 10 BAR
DELIVERY PRESSURE: 10 BAR
DELIVERY PRESSURE: 10 BAR

SCALE: 1/1000

DATE: 28/09/2013 DRAWN BY: C. JACQUIN

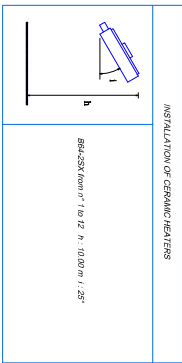

INSTALLATION OF CERAMIC HEATERS

FOR THE PROPER OPERATION OF THE HEATING SYSTEM, ALLOW AN OVERHEAD CRANE PERMANENTLY 3000 mm